

Flagstone Grouted - Concrete Slab Application

Flagstone Paving Laying Specification

Mortar mixture

3 parts building sand.

1 part cement (only CEM II V42.5- V with flyash) NOT S for Slagment.

Mix to a brick mortar consistency.

Application of flagstone

Wet flagstone and place on to mortar mixture.

Tap flagstone down to desired level with white rubber mallet, to avoid marking the flagstones.

* Avoid walking on flagstone pavers for 12 hours.

Grout Mixture

3 Parts yellow or brown plaster sand.

1 part cement (only CEM II V42.5- V with flyash) NOT S for Slagment.

1 part contractors tile adhesive for added strength.

Application of grout

Apply wet grout into grout joints and remove excess with a damp sponge.

Leave to dry for approximately 45 min until grout can be crumbled and brush off excess grout to desired level using a stiff nylon brush.

Sweep floor using a soft broom and finish grouting with a damp sponge.

Grouting depth

Cotswold Flagstone Range - 1 mm

Chateaux Flagstone Range - 1 mm

Moroccan Flagstone Range - 1 mm


Flamed Granite Flagstone Range - 1 mm

Classic Flagstone Range - 6 mm

Manor Flagstone Range - 6 mm

— Paving Flooring Ranges

— Rustic Paving Flooring Ranges

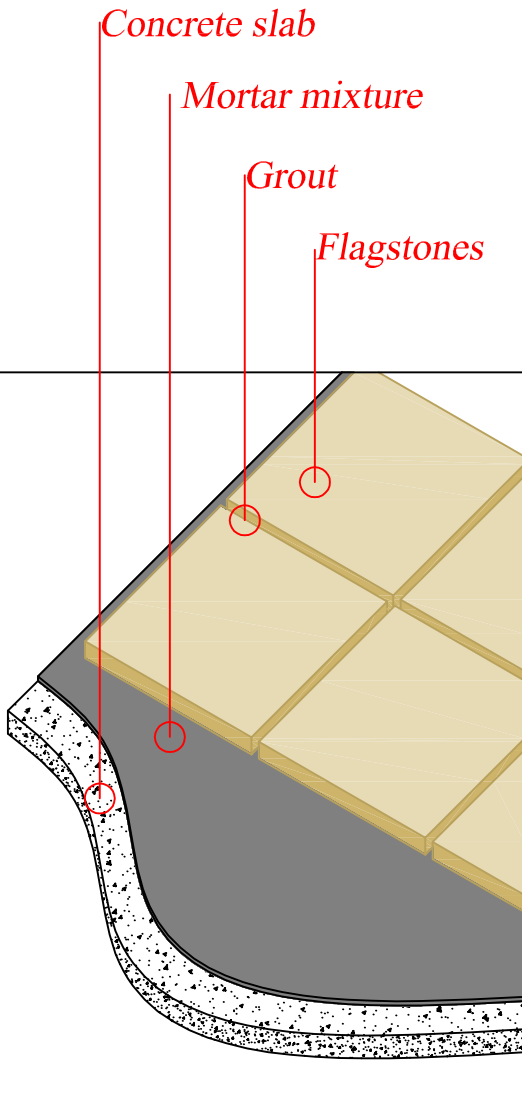

Diagram