


Flagstone Grouted - Driveway Application

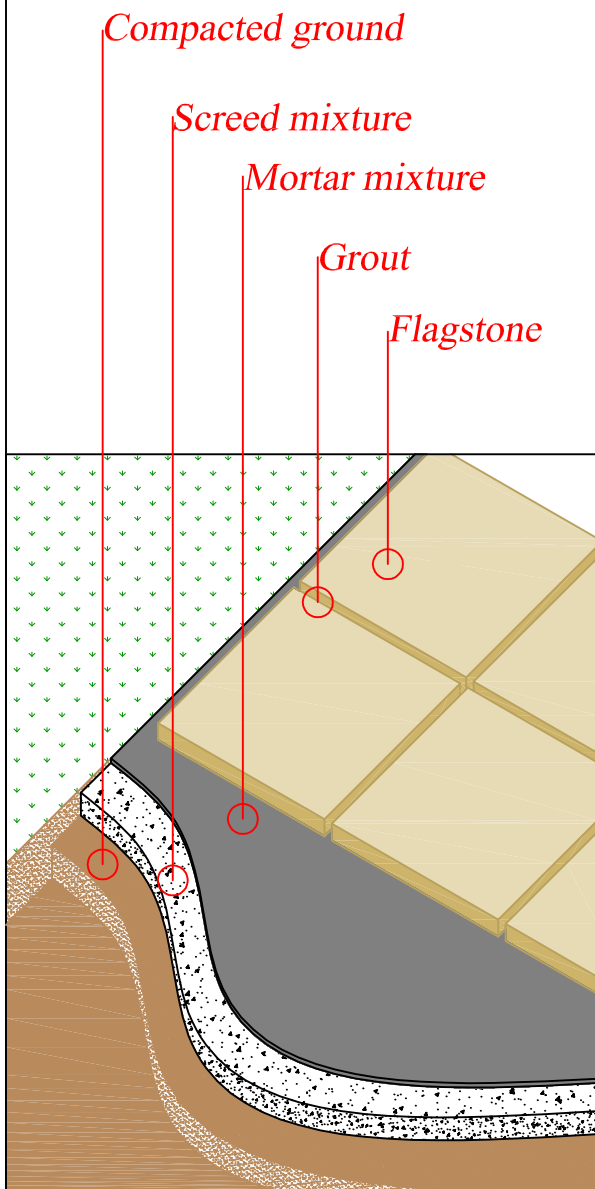

Diagram

A) Grout Mixture

- * 3 parts yellow or brown plaster sand.
- * 1 part tile adhesive (makes mix more plasticized)
- * 1 part cement (only CEM I or CEM II V42.5 - V with flyash NOT S for Slagment).

Application of grout

- * 10mm grout gap at top of flagstone.
- * Wet tiles before applying grout & remove excess grout immediately with a damp sponge.

B) Mortar Mixture

- * 2 parts Building Sand.
- * 1 part cement (only CEM I or CEM II V42.5 - V with flyash NOT S for Slagment)

Application of flagstone to mortar base

- * Wet tiles before applying to mortar mixture.
- * Bed flagstone in mortar and tap down with a white rubber mallet to correct level.

C) Screed Mixture

- * Lay 100mm of crusher run.
- * Rake 30mm of cement into crusher run (1 - 50kg bag for every 9 m2) to stabilize (only CEM I or CEM II V42.5 - V with flyash NOT S for Slagment)
- * Lightly wet & compact using Bomag compactor.
- * Crusher dust - Afrisam.

D) Compacted Ground

- * Soil should be well compacted using a 100 kg plate compactor.
- * Where additional soil is required for filling, soil should be compacted in layers (max of 400mm at a time) using a wacker (tamper). Then final compaction using plate compactor.