


# Flagstone Grouted - Existing Concrete Slab Application

## Flagstone Paving Laying Specification

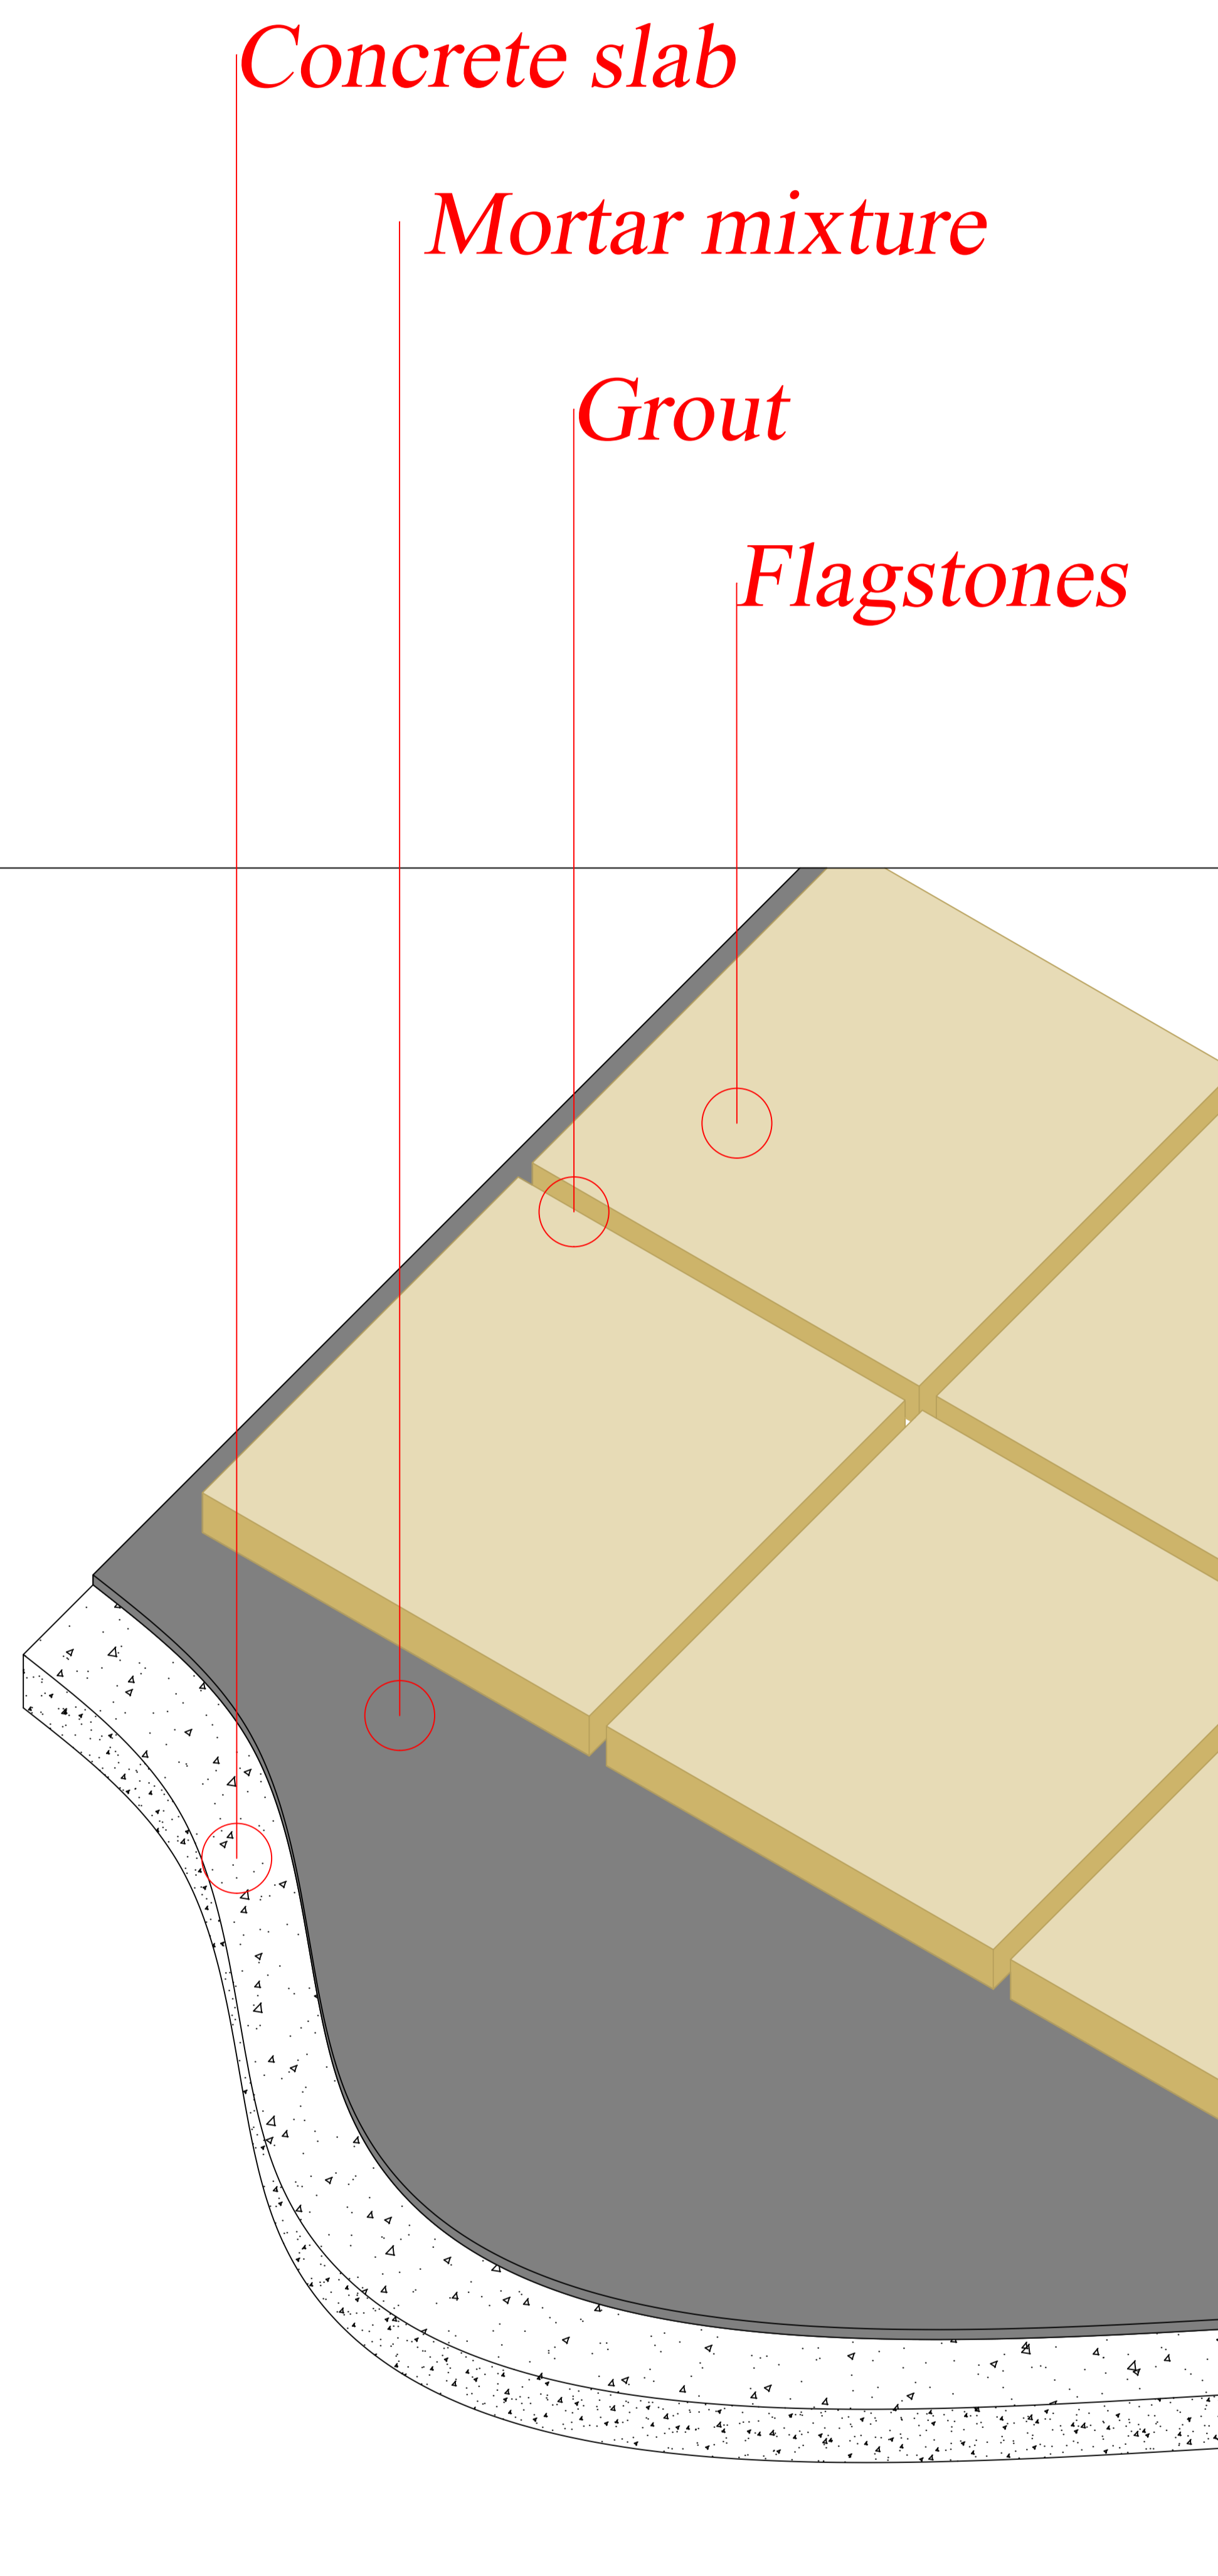

*Diagram*

### Mortar mixture

3 parts building sand.

1 part cement ( only CEM II V42.5- V with flyash ) NOT S for Slagment.

Mix to a brick mortar consistency.

### Application of flagstone

Apply bonding liquid to base surface using a block brush

Wet flagstone and place on to mortar mixture.

Tap flagstone down to desired level with white rubber mallet, to avoid marking the flagstones.

\* Avoid walking on flagstone pavers for 12 hours.

### Grout Mixture

3 Parts yellow or brown plaster sand.

1 part cement ( only CEM II V42.5- V with flyash ) NOT S for Slagment.

1 part contractors tile adhesive for added strength.

### Application of grout

Apply wet grout into grout joints and remove excess with a damp sponge.

Leave to dry for approximately 45 min until grout can be crumbled and brush off excess grout to desired level using a stiff nylon brush.

Sweep floor using a soft broom and finish grouting with a damp sponge.

### Grouting depth & Spacing

Cotswold Flagstone Range -

Grouting Depth 1 mm

Grouting Spacing 10 to 12mm

Chateaux Flagstone Range -

Grouting Depth 1 mm

Grouting Spacing 10 to 12mm

Flamed Granite Flagstone Range -

Grouting Depth 1 mm

Grouting Spacing 8mm

Classic Flagstone Range -

Grouting Depth 1 mm

Grouting Spacing 15 to 20mm

Manor Flagstone Range -

Grouting Depth 1 mm

Grouting Spacing 15 to 20mm